## **PCT**

#### WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup>:

H04M 15/28, 15/22

(11) International Publication Number: WO 98/52344

(43) International Publication Date: 19 November 1998 (19.11.98)

US

(21) International Application Number: PCT/SE98/00873

(22) International Filing Date: 12 May 1998 (12.05.98)

(30) Priority Data: 08/855,529 13 May 1997 (13.05.97)

(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON [SE/SE]; S-126 25 Stockholm (SE).

(72) Inventor: STEIJER, Jörgen; Örngatan 14, S-582 37 Linköping (SE).

(74) Agent: ERICSSON RADIO SYSTEMS AB; Common Patent Dept., S-164 80 Stockholm (SE).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

#### **Published**


With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments,

(54) Title: COMMUNICATION METHOD, SYSTEM, AND DEVICE FOR REDUCING PROCESSOR LOAD AT TARIFF SWITCH

#### (57) Abstract

communication Α device, method and system in which tariff information is provided to a communication device from a control station at call setup, and the charges associated with a call can be calculated and displayed to a device user at the device itself, rather than at a central communication system processor. tariff information includes the current tariff, future tariff, and time of tariff switch. By providing the tariff information to the communication device. significant signal processing resources at the central system communication processor can be saved.

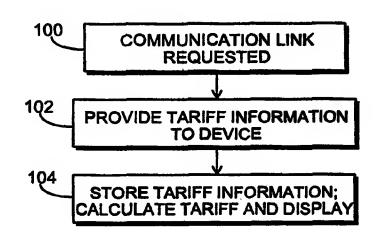

## FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	$\mathbf{G}\mathbf{R}$	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
ВЈ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	$\mathbf{z}\mathbf{w}$	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	ΚZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		_
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

1

# COMMUNICATION METHOD, SYSTEM, AND DEVICE FOR REDUCING PROCESSOR LOAD AT TARIFF SWITCH

### Field of the Invention

5

10

15

20

25

The present invention generally relates to billing or tariff calculation for communication systems. More particularly, the present invention relates to a method, device, and system for determining tariffs while conserving the processing resources of a central communication system processor.

### **Background of the Invention**

It is frequently desirable for a person placing a call over a telecommunication system to be informed of the costs of the call. Thus, many telecommunication systems incorporate charging services which inform a calling party of the tariff. The tariff is typically based on some number of component charging elements, such as: 1) a charge indicator for indicating to a calling party whether that party will be charged for the call; 2) initial start units indicative of service charges to be assessed at the start of the charging period; 3) an initial time period indicative of the time from the start of the charging period until the first periodic increment of service charges; 4) a time period indicative of the time between subsequent increments of service charges; and 5) units per time period (UTP), indicative of the number of charging units (e.g., dollars) to be added periodically to service charges at the expiration of the initial time period and subsequent time periods. From this information, or similar parameters, the total tariff or charge for a call can be calculated.

FIG. 1 is a table showing exemplary tariff charging elements for different calling plans. In this example, subscribers to each plan are assessed a monthly charge (in this example, 7300 yen or 4400 yen), and are also charged for calls according to the rates for various tariff classes (TC= a-f) as expressed in the table. The tariff classes are determined based upon the distance involved in a subscriber's call (e.g., whether the call is within a predetermined local area, some other area within 160 km, or an area greater than 160 km), and upon the particular monthly plan in which the subscriber is

5

10

15

20

25

enrolled. For each tariff class, the tariff to be applied depends upon the time frame during which the call takes place (e.g., day, night, morning).

FIG. 2A is a graphical representation of how the charging elements affect the service charges. The graph shows the applicable service charges (including an initial unit IV and additional units per time period UTP) as a function of time, i.e., the service charges that would be applied if a call "release" were to occur at a particular time, in this case designated by X.

Tariff charging elements are subject to change due to factors such as a change in day (e.g., from a mid-week day to a weekend day or holiday), or a change in the time of day (e.g., from a daytime rate to an evening rate). Sometimes, a tariff switch will occur during a call. FIG. 2B is a graphical representation showing the effect of such a tariff switch at time X. A typical tariff change can be expressed as a change in charge rate per time period (e.g., from \$0.10/minute to \$0.20/minute), a change in time period duration (e.g., \$0.10/minute to \$0.10/30 seconds), or both.

Most charging services are implemented by a central system processor, which, in the event of a change in the tariff information during a communication, must redetermine the tariff charging elements for each caller and notify each calling party of the change. Thus, when a tariff change occurs, significant signal processing resources are consumed. Further, because a tariff change may affect a large number of callers, there can be a significant drain on central system processor resources when a tariff change occurs, and there can also be significant delays in notifying calling parties about the tariff change. Known tariff calculation methods and systems do not adequately address this problem.

U.S. Patent 5,303,297 to Hillis discloses a billing system which adapts to a communication system in real time. A central system processor, or billing computer, computes the rate, which is indicated to an individual user. If the user agrees to the rate, the call is connected and the central system processor recalculates the rate based on the overall system load. Each time the rate changes (due to system load changes), the user is notified and asked for approval.

5

10

15

20

25

U.S. Patent 5,488,655 to Hamlen discloses a method and system for controlling traffic load by using variable price incentives. Hamlen is similar to Hillis in that a rate is calculated by a central processor, which provides the rate to the user.

U.S. Patent 4,751,728 to Treat discloses a telephone call monitoring, metering and selection device which attaches to a standard telephone. A user pre-programs rate information for multiple telephone service providers (e.g., different long distance companies), which allows the device to determine which service provider will cost the least for a given call. While the device is capable of calculating rates and displaying cost to a user, the device is not an integral part of the telephone. Further, since the rate information is programmed by the user, the device is subject to human error.

U.S. Patent 5,400,395 to Berenato discloses a telephone line selector and accounting system for selecting the lowest-priced long distance carrier and displaying rate information to a user during a phone call. The system automatically calculates rate information based on carrier update tones, and can be connected between several carriers and multiple telephones. The device therefore is not an integral part of the telephone.

All of the above-described systems involve the calculation of rates at a device external to a telephone device, and therefore do not adequately address the problem of reducing processor load upon the occurrence of a tariff switch. It would be desirable for a rate calculation system to reduce this processor load.

### **Summary of the Invention**

The present invention overcomes the above-noted problems, and achieves additional advantages, by providing for a tariff calculation system in which tariff information is provided to a communication system user (i.e., a mobile communication device) at call set-up. By providing the tariff information to a device at call set-up, the user's communication device can perform the tariff calculation, thus reducing the processor load of the central system processor.

5

10

15

20

25

#### **Brief Description of the Drawings**

The present invention can be more fully understood upon reading the following Detailed Description of the Preferred Embodiments in conjunction with the accompanying drawings, in which:

FIG. 1 is a table of tariff charges for a typical telecommunication system:

FIGs. 2A and 2B are graphical representations of tariff charges for a typical telecommunication system during a time period with a constant tariff rate and during a time period which includes a tariff switch, respectively;

FIG. 3 is a block diagram of a communication device and system which advantageously employs a method according to the present invention; and

FIG. 4 is a flow chart describing the method according to an exemplary embodiment of the present invention.

## **Detailed Description of the Preferred Embodiments**

FIG. 3 shows a block diagram of a wireless communication device and system in which the present invention can be implemented. It will be appreciated that while a wireless communication system is shown, the principles of the present invention are applicable to many types of communication devices and systems. In FIG. 3, the device 10 includes a transmitter circuit 12, receiver circuit 14, an antenna 16, and processing circuitry 18. The device 10 transmits and receives signals through antenna 16, to allow the device to exchange communication signals with a control station such as base station 20. The base station 20 communicates with a plurality of communication devices substantially similar to the device 10. In a typical wireless communication system, multiple base stations are provided, and each base station is connected to another control station such as central mobile switching center (MSC) 22 associated with a public switched telephone network (PSTN- not shown). In a typical communication system, tariff information is calculated at the MSC 22 and transmitted as necessary to individual communication devices such as device 10. When a tariff switch occurs, it becomes necessary to notify a potentially large number of

5

communication devices engaged in communication. As discussed above, a tariff switch causes a significant drain on processor resources at the MSC 22.

In accordance with the present invention, when the communication system establishes a communication link between device 10 and base station 20, which may be the result of device 10 initiating a call or receiving a call, tariff information is sent to the device 10, and is stored in processing circuitry 18. This tariff information allows the device 10 to calculate and display to the user of the terminal the charge rate or total tariff. The tariff information preferably includes the current tariff, the future tariff, and the time until the tariff switch will occur. By performing tariff calculations in the communication device 10 rather than the MSC 22, significant processing resources at the MSC 22 can be saved.

5

10

15

20

25

30

FIG. 4 is a flow chart describing a method according to an exemplary embodiment of the present invention. The process begins in step 100, when a communication link involving a communication device 10 is requested. The request can be initiated by the communication device 10 or by another communication device seeking to communicate with communication device 10. In step 102, the MSC 22 provides tariff information, including charging rates for the currently applicable tariff, the next tariff, and the time at which the applicable tariff will switch from the current tariff to the next tariff, to the device 10. Since, in the exemplary tariff schedule shown in FIG. 1, the tariff class includes the current tariff, next tariff, and time of tariff switch, the tariff class can be transmitted to the device 10 as the tariff information. The tariff information is preferably provided at or before call setup (that is, at or before the establishment of the communication link). In step 104, the tariff information is stored in the device 10 (e.g., in processing circuitry 18), and the device 10 calculates and displays tariff information for the subscriber.

A particular example of a call in which the present invention can be implemented will now be described.

The tariff information provided to the device 10 in step 102 includes a current tariff associated with a current time period value (TP1), and a next tariff associated with a next time period value (TP2). The next tariff is the tariff to be used after the

5

10

15

20

25

tariff switch. Also provided is the time from call setup to the tariff switch, as calculated at the control station (base station 20 or MSC 22).

According to an exemplary embodiment, the time until the tariff switch is converted to a number of current time periods until tariff switch (NTPUTS) at the control station, according to the following equation:

NTPUTS = time until tariff switch / current time period.

Thus, the new charging elements (associated with the next tariff) are not applied until the expiration of the ongoing time period.

For example, assuming a time until tariff switch of 3 minutes and 15 seconds (i.e., 195 sec.), a current time period of 10 seconds, and the corresponding NTPUTS value is 195 / 10 (i.e., approximately 20).

The NTPUTS and the next time period are sent, together with the current time period, to the device 10 in a call setup message.

By implementing a counter in the device 10, the device can determine when a tariff switch will occur, and then automatically adjust the time period value.

In this example, a tariff class TC = a is applicable for a call within a predefined local area. If the call is made at 18.25.14 hours, tariff T = 1 will be used. The current time period value according to tariff 1 is 9.0 seconds. Since the tariff class TC = a, the tariff 1 will change to tariff 2 at 19.00 hours.

The time left until the tariff switch is 19.00.00 - 18.25.14 = 34 min. and 46 seconds, or 2086 seconds.

In this example, NTPUTS = 2086/9 = 231.78 = approximately 232.

The time period value for tariff 2 is 16.0 seconds.

Thus, in this example, the following data will be included in the tariff information provided to the device 10 at call setup:

- Current time period = 9.0 sec.
- -NTPUTS = 232.
- Next time period = 16.0 sec.

7

As a result of being provided with this information, the device 10 can determine when 232 time periods have expired, and can change the time period value from 9.0 seconds to 16.0 seconds upon the expiration of the 232 time periods.

It will be appreciated that according to the present invention, by sending tariff switch information at call setup instead of waiting until a tariff switch, the central processor load at the tariff switch will be reduced. Furthermore, the present invention avoids the time differential resulting from sending tariff switch information to individual devices, since the information is already in the mobile station.

5

10

While the foregoing has included many details and specificities, it is to be understood that these are merely for purposes of explanation, and are not to be construed as limitations of the invention. Many modifications will be readily apparent to those of ordinary skill in the art which do not depart from the spirit and scope of the invention, as defined by the following claims and their legal equivalents.

#### WHAT IS CLAIMED IS:

1. A communication system, comprising:

one or more control stations, each control station associated with a public switched telephone network (PSTN); and

5

10

one or more communication devices for exchanging communication signals with the one or more control stations,

wherein tariff information is provided to the one or more communication devices from the one or more control stations at the initiation of a communication link, and the one or more communication devices calculate a tariff associated with a communication link between the one or more communication devices and the one or more control stations based on the tariff information.

- 2. The system of claim 1, wherein the tariff information includes a current tariff, a next tariff, and a tariff switch time.
- 3. The system of claim 1, wherein the communication devices are wireless communication devices.
- 4. A method for calculating a tariff associated with a communication link, comprising the steps of:

transmitting tariff information from a control station to a communication device at initiation of the communication link; and

20

25

15

calculating a tariff associated with a communication link between the communication device and the control station at the communication device, using the tariff information.

5. The method of claim 4, wherein the communication link is a wireless communication link, and the step of transmitting is performed using a wireless communication signal.

WO 98/52344

5

and


- 6. The method of claim 4, wherein the tariff information includes a current tariff, a next tariff, and a tariff switch time.
  - 7. A wireless communication device, comprising: transmitting means for transmitting communication signals to a control station; receiving means for receiving communication signals from the control station;


processing means for calculating a tariff for a communication link between the control station and the wireless communication device based on tariff information provided by the control station at the initiation of the communication link.

8. The device of claim 7, wherein the tariff information includes a current tariff, a next tariff, and a tariff switch time.

FIG. 1

PLAN 1					PLAN 2				
MONTHLY CHARGE		7300 YE	Z			4400 YE	Ν		
	DAY 08-19	NIGHT 19-24	MORNING 24-08		DAY 08-19	NIGHT 19-24	MORNING 24-08		
TC=a LOCAL CHARGING AREA		TP=16.0	T=3 TP=18.0 SEC.	TC=b		T=5 TP=10.0 SEC.	T=6 TP=11.0 SEC.		
TC = c OTHER AREA < 160Km DISTANCE		T=8 TP=14.5 SEC.	T=9 TP=16.0 SEC.	TC=d	T=10 TP=5.0 SEC.	T=11 TP=9.0 SEC.	T = 12 TP = 10.0 SEC.		
TC = e OTHER AREA > 160Km DISTANCE	T=13 TP=6.5 SEC.	T=14 TP=12.0 SEC.	T=15 TP=13.0 SEC.	TC=f	T=16 TP=4.0 SEC.	T=17 TP=7.0 SEC.	T=18 TP=8.0 SEC.		

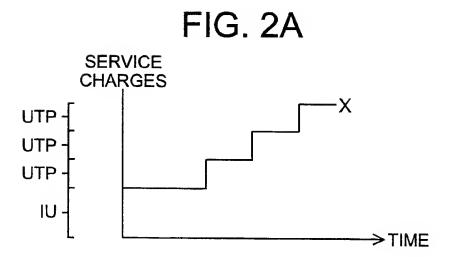

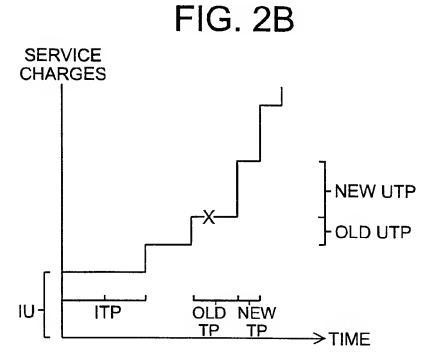


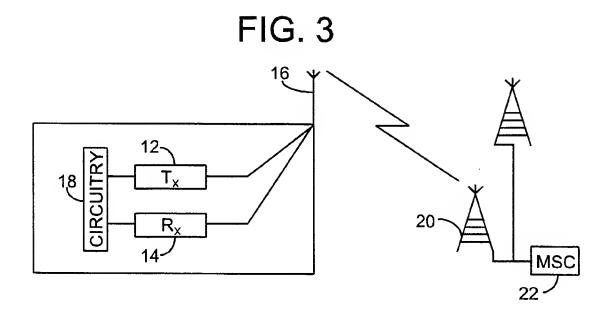


FIG. 4

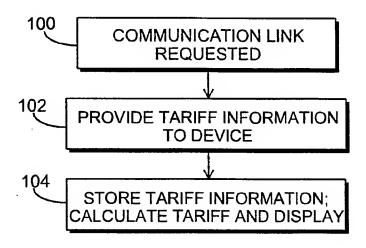

#### INTERNATIONAL SEARCH REPORT

Inte. .:ational Application No PCT/SE 98/00873

A. CLASSIFICATION OF SUBJECT MATTER IPC 6 H04M15/28 H04M H04M15/22 According to International Patent Classification (IPC) or to both national classification and IPC **B. FIELDS SEARCHED** Minimum documentation searched (classification system followed by classification symbols) H04M IPC 6 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practical, search terms used) C. DOCUMENTS CONSIDERED TO BE RELEVANT Category Citation of document, with indication, where appropriate, of the relevant passages Relevant to claim No. X PATENT ABSTRACTS OF JAPAN 1-8 vol. 014, no. 451 (E-0984), 27 September 1990 & JP 02 180462 A (TAIKO DENKI SEISAKUSHO:KK;OTHERS: 01), 13 July 1990 see abstract EP 0 647 055 A (AT & T CORP) 5 April 1995 1,3-5,7Α see abstract 2,6,8 see column 5, line 44 - line 50 Α EP 0 734 144 A (SIEMENS AG) 1-8 25 September 1996 see column 4, line 19 - line 23 WO 95 20298 A (NOKIA TELECOMMUNICATIONS Α 1 - 8OY) 27 July 1995 see page 5, line 24 - page 6, line 23 χ Further documents are listed in the continuation of box C. X Patent family members are listed in annex. ° Special categories of cited documents : "T" later document published after the international filing dete or priority date and not in conflict with the application but cited to understand the principle or theory underlying the "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international "X" document of particular relevance; the claimed invention filing date cannot be considered novel or cannot be considered to "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) involve an inventive step when the document is taken alone "Y" document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such docu-"O" document referring to an orel disclosure, use, exhibition or ments, such combination being obvious to a person skilled in the art. "P" document published prior to the international filing date but later than the priority date claimed "&" document member of the same patent family Date of the actual completion of theinternational search Date of mailing of the international search report 7 October 1998 19/10/1998 Name and mailing address of the ISA Authorized officer

Form PCT/ISA/210 (second sheet) (July 1992)

Fax: (+31-70) 340-3016

European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,

Montalbano, F

# INTERNATIONAL SEARCH REPORT

Inte .tional Application No PCT/SE 98/00873

		LC1/2E 38/008/3
C.(Continua	ation) DOCUMENTS CONSIDERED TO BE RELEVANT	
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Α	WO 96 24229 A (MCGREGOR, D.) 8 August 1996 see page 4, line 1 - line 16	1-8
<i>t</i>	WO 96 18259 A (DECAUX JEAN CLAUDE ;GONTER FERENC (FR)) 13 June 1996 see page 10, line 23 - line 31	1-8
:		
		-

1

# INTERNATIONAL SEARCH REPORT

information on patent family members

inte ional Application No PCT/SE 98/00873

Patent document cited in search repor	t	Publication date		atent family member(s)	Publication date	
EP 0647055	Α	05-04-1995	JP	7177264 A	14-07-1995	
EP 0734144	Α	25-09-1996	NONE			
W0 9520298	Α	27-07~1995	FI	940339 A	25-07-1995	
			AU	681933 B	11-09-1997	
			AU	1419795 A	08-08-1995	
			CN	1139508 A	01-01-1997	
			EP	0741949 A	13-11-1996	
			JP	9507733 T	05-08-1997	
W0 9624229	Α	08-08-1996	US	5577100 A	 19-11-1996	
			AU	695509 B	13-08-1998	
			AU	4901096 A	21-08-1996	
			BR	9606875 A	23-12-1997	
			CA	2211892 A	08-08-1996	
			CN	1176039 A	11-03-1998	
			EP	0808547 A	26-11-1997	
W0 9618259	Α	13-06-1996	FR	2728125 A	14-06-1996	